


nannidiesel

energy in blue

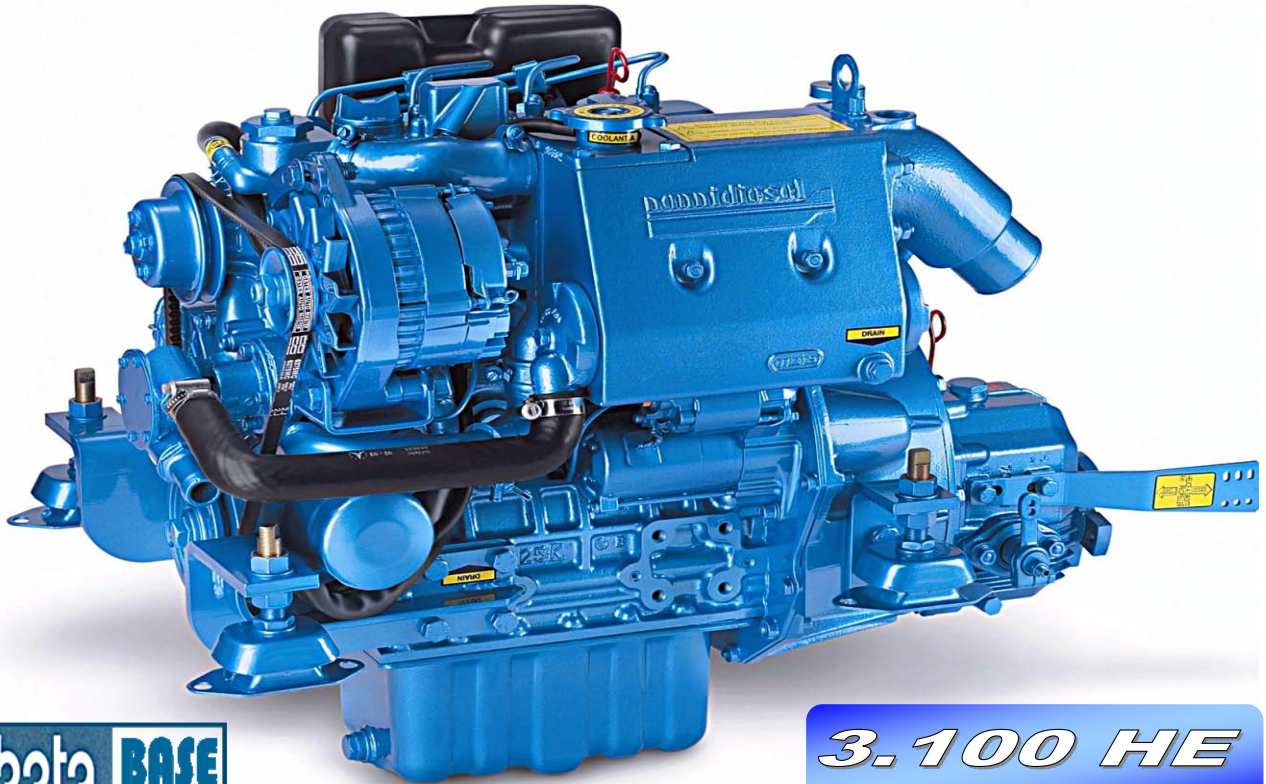

Kubota BASE

3.100 HE


21,3 kW (29 hp)

Technical Specifications

Power: kW (hp)	21,3 (29)
Maximum RPM	3600
Displacement: ci (cc)	61.09 (1001)
N° of cylinders	3 in line
Bore / Stroke: in (mm)	2.99x2.90 (76x73,6)
Compression Ratio	23 / 1
Injection	Indirect (E-TVCS)
Intake	Atmospherical
Cooling System	Heath Exchanger
Alternator	12 V 100 A
Instrument Panel	A 3
Transmission	Mechanical or hydraulical
Weight (incl trans) lb (kg)	286.5 (130)

Hose Diameters

Exhaust: in (mm)	2.4 (60)
Fuel: in (mm)	0.315 (8)
Sea Water: in (mm)	1 (25)
Engine Max Install. Angle	15°

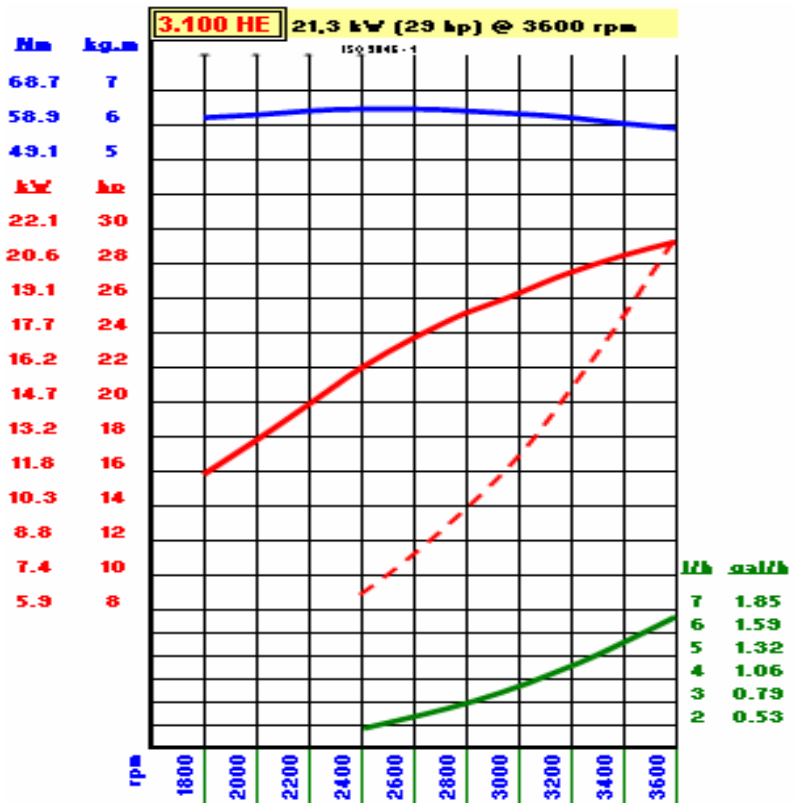

NANNI DIESEL recommends




3.100 HE

Kubota BASE

Line drawings

3.100 HE / TMC 40

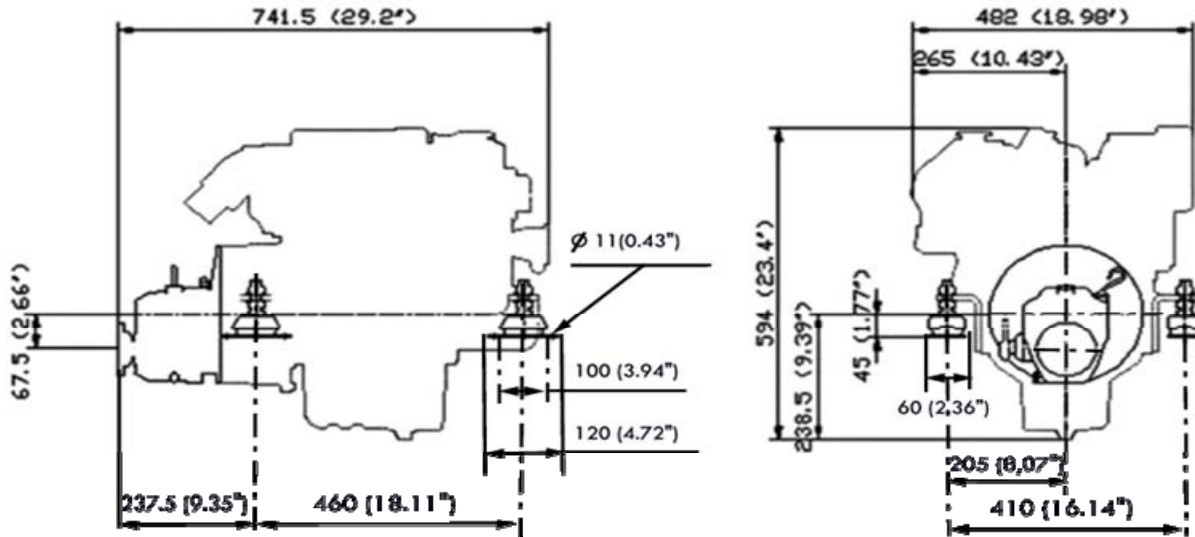

Standard Equipment

- A 3 Instrument Panel
 - _ Tachometer / hourmeter
 - _ Oil Pressure Warning Light & Audio Alarm
 - _ Water T° Warning Light & Audio Alarm
 - _ Battery Charge
 - _ Glow Plugs
 - _ Starter Key
- Mechanical or hydraulic Transmission
- Prearrangement for cable use
- Engine Mounts
- Owners Manual
- Warranty Certificate
- Electrical Harness 13' (4m)



- Heat Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Electrical Wiring 12 V
- Oil Drain Pump
- Electrical Stop

- Bipolar Electrical Wiring
- Power Take-Off
- Coupling
- Propeller shaft
 - Exhaust System
 - Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Keel Cooling
- B 3 or C3 Instrument Panel